

SCHOOL STREAM ENKAMAT PROTECTION HAVELOCK NORTH, HAWKES BAY

ENKAMAT - EROSION PROTECTION

Products: Enkamat 7018, Aluminium Pegs

Problem

School Stream runs through the back of private properties, in one of the large catchment areas that leads off the Te Mata Peak range, originating in a very steep gully. Runoff is controlled by a detention dam limiting peak flows (which can exceed super critical velocities) to 20 year events. Peak rainfall causes flooding and erosion due to the meandering nature and width of the stream (bed is alluvial and highly erodible).

Solution

Enkamat was chosen as the lining for the stream, which firstly had to be reshaped and widened to cope with the high expected flows. Degrading streambeds and unstable banks are not desirable in high value residential areas. This decision proved to be sound, with 6 hours of rain of a 15 year intensity storm event occurring in the first maintenance period (within 2 months of installation). Little damage occurred, and the Council was very happy with the result. An enhanced stream reserve environment has now been created.

The use of the Enkamat 7018 was determined by modelling the expected flow rates. The 7018 allows for higher flow rates during peak flooding events, once vegetation has established.

The channel was cut and reshaped to a 2.4m base width, with a slope batter of 1:2 to a height of 500mm. Installation started from the downstream end, with toe in trenches at the top of both slopes. Pinning of the Enkamat was done with aluminium pins. Overlap of Enkamat was 150mm, with 2/3 of the grass seed mix sown into the Enkamat, before covering with topsoil and the remaining 1/3 seed mix put on top. Approximate installation per day was 30 lineal metres, with 5 people, using a 6 tonne digger, a light truck and light plate compactor.

Client name:

HASTINGS DISTRICT COUNCIL

Main contractor:

INFRACON HAWKES BAY

Consultant:

HASTINGS DISTRICT COUNCIL

Products used:

ENKAMAT 7018, ALUMINIUM PINS

Construction date:

FEBRUARY - APRIL 2008



Site prior to construction

Date: January 2004



Placement of Enkamat


Date: February 2008



Unvegetated stream of flood

Date: August 2008

The chart below provides a guide to the performance of Enkamat, a three dimension turf reinforcement mat (TRM). One of the key factors for this performance is the soil holding capacity provided by Enkamat. Unlike thin two dimensional erosion control mats (ECM's), Enkamat retains the soil providing a suitable depth of soil for root development within the mat.

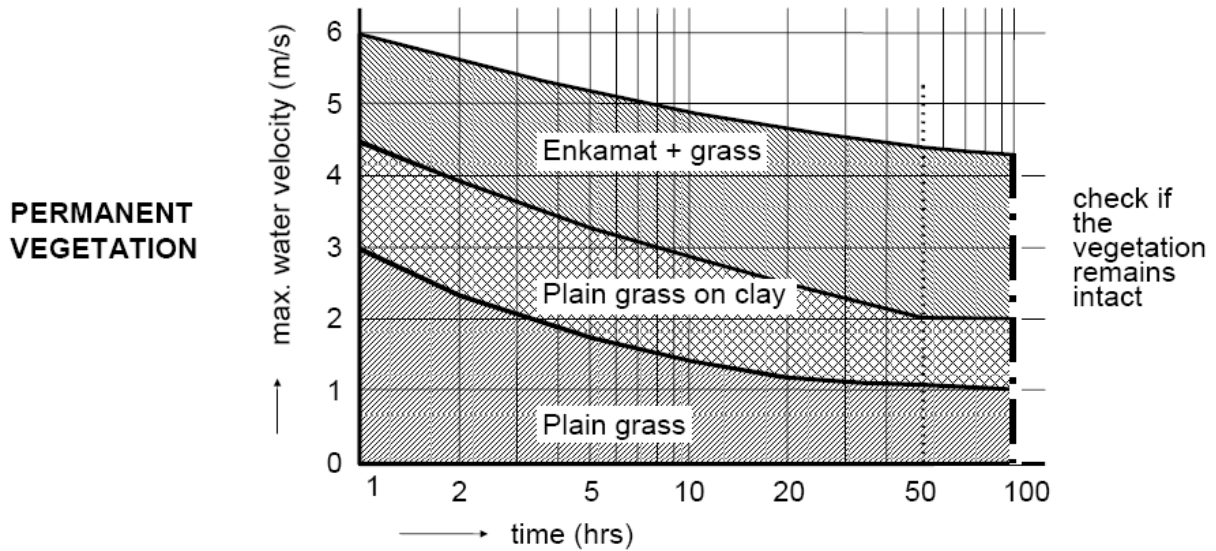

Completed vegetated stream

Date: October 2008

Maccaferri NZ Ltd.

14 Goodman Place, P.O. BOX 12536, Penrose, Auckland, New Zealand
 Tel. (+64) 9 6346495 - Fax (+64) 9 6346492, FREEPHONE 0800 60 60 20
 E-mail: sales@maccaferri.co.nz - Web site: www.maccaferri.co.nz
 Quality System AS/NZS ISO 9001:2000

The information presented herein is, to the best of our knowledge and belief, correct and is subject to periodic review and revision. The validity of the information relative to the subsoil, hydraulic and other engineering conditions must be ascertained by a suitably qualified person. No warranty is either expressed or implied. Unauthorised reproduction or distribution is prohibited. Copyright is vested in Maccaferri or Maccaferri's Principal where applicable.