

## BRIDGE 60A RAIL LINE EXTENSION SWANSON, AUCKLAND

### REINFORCED SOIL SLOPES

**Product:** Gabions, Tensar Geogrids

#### Problem

Part of the ongoing Ontrack New Zealand double rail track upgrading works for the Auckland Region included the requirement to widen the bridge across Candia Road to cater for an additional railway lane. The site had limited space available for the construction of a shallow slope between the existing railway embankment and stream adjacent to the bridge.

A steeper reinforced soil embankment was chosen to solve the problem of space as well as having the ability to support the heavy loads expected during placement of the bridge elements.

The choice of facing also presented some problems as there were not only the technical and durability issues to be considered but also speed of construction when working adjacent to a working rail network.

#### Solution

The design of the 7m high reinforced soil embankment considered the short term load case for a 300 tonne crane on the level platform, the critical case being 625kPa on one leg, as well as the long terms loads that include a 4m high vertical faced anchored earth wall to be constructed at a later date on the platform for the purpose of the rail line extension.

A number of stability checks had to be considered to take into account the various potential failure modes and external load cases including:

- Internal & Compound Stability - the critical circles from the wall toe are forced back into the retained soil zone due to layers of geogrid reinforcement
- Global Stability - this is to investigate deeper seated potential failure circles behind the reinforced soil block and anchored earth block
- Wedge Stability - potential sliding at the base

Client name:

ONTRACK NZ

Main contractor name:

ROGERS CIVIL LTD

Consultant:

FRASER GEOLOGICS

Product used:

GABIONS, TENSAR RE GEOGRID

Construction date:

NOVEMBER 2007



Site prior to construction

Date: Oct 2007



Lower prefilled gabion section

Date: Nov 2007



Placement of geogrid & fill

Date: Nov 2007

## Construction

Pre-filled gabions with ballast stones were selected for the facing of the structure. These could be mechanically placed to form the steeper face for the lower 2.5m within the design flood zone and a 45 degree slope constructed on top to provide a platform sufficiently wide for a 300 tonne crane to be positioned and operate from.

The placement of the pre-filled gabions provided a rapid method of front face construction, a highly frictional and free draining scoria fill, along with Tensar geogrid reinforcement ensured that construction could continue in a range of weather conditions with minimal interruption to the construction program.


Gabions were pre-filled so that they were not within the critical path of the project installation schedule.

No deformations or distress to the structure was observed during the critical phase of placement of the bridge elements. These observations supported the design principles adopted for this site.



300T crane operation

Date: Nov 2007

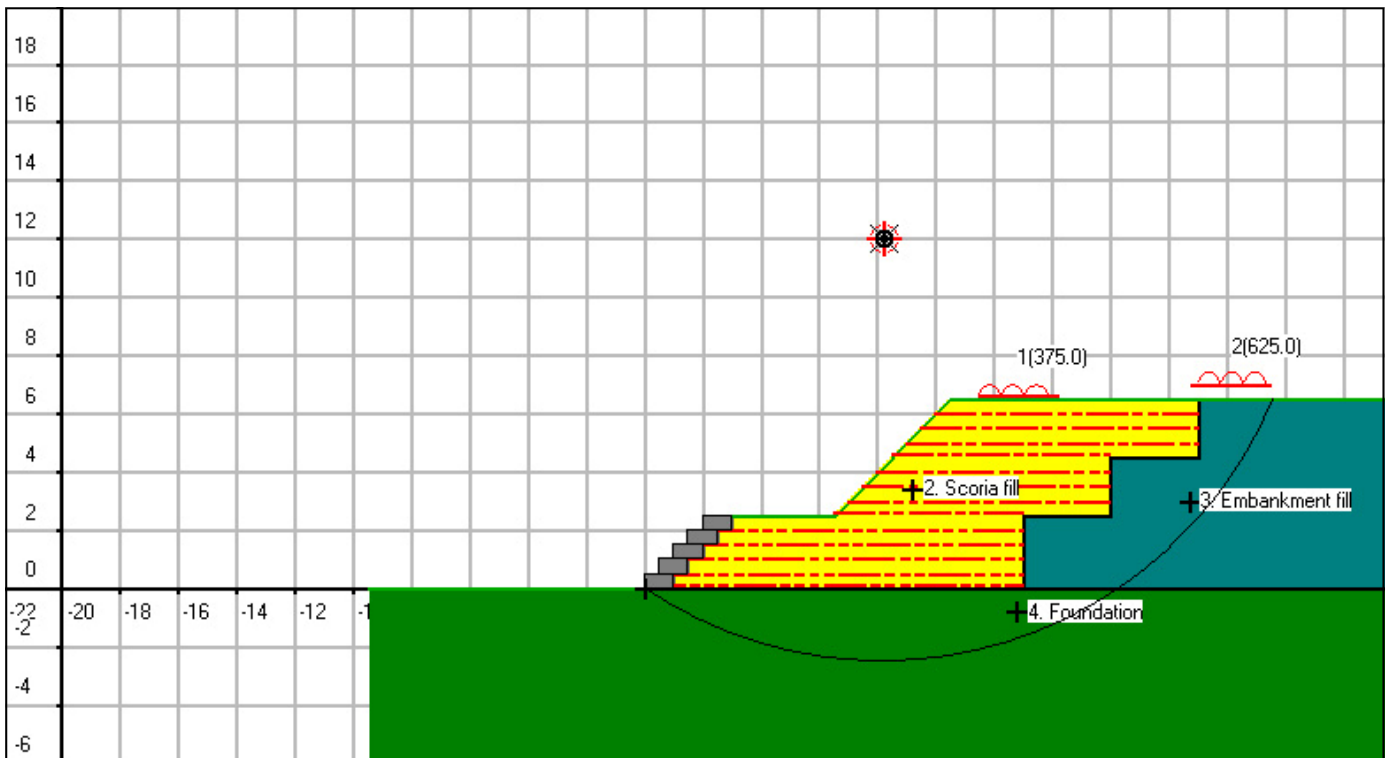

Section showing a typical circular analysis for crane loads

Date: October 2007

### Maccaferri NZ Ltd.

14 Goodman Place, P.O. BOX 12536, Penrose, Auckland, New Zealand  
 Tel. (+64) 9 6346495 - Fax (+64) 9 6346492, FREEPHONE 0800 60 60 20  
 E-mail: sales@maccaferri.co.nz - Web site: www.maccaferri.co.nz  
 Quality System AS/NZS ISO 9001:2000

The information presented herein is, to the best of our knowledge and belief, correct and is subject to periodic review and revision. The validity of the information relative to the subsoil, hydraulic and other engineering conditions must be ascertained by a suitably qualified person. No warranty is either expressed or implied. Unauthorised reproduction or distribution is prohibited. Copyright is vested in Maccaferri or Maccaferri's Principal where applicable.